

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 August 2005 (11.08.2005)

PCT

(10) International Publication Number
WO 2005/074308 A1

(51) International Patent Classification⁷: **H04Q 7/22**, 7/38

(21) International Application Number:
PCT/SE2005/000108

(22) International Filing Date: 28 January 2005 (28.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0400163-2 28 January 2004 (28.01.2004) SE

(71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET LM ERICSSON (publ)
[SE/SE]; Torshamnsgatan 23, S-164 83 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BACKLUND, Ingemar [SE/SE]; Terassvägen 5, S-191 44 Sollentuna (SE). DIACHINA, John [CA/US]; 505 Kristin Drive, Garner, NC 27529 (US). MILDH, Gunnar [SE/SE]; Sorögatan

3, S-164 41 Kista (SE). TEDENVALL, Lars [SE/SE]; Röingeatan 114, S-281 37 Hässleholm (SE).


(74) Agent: MAGNUSSON, Monica; Ericsson AB, Patent Unit Radio Networks, S-164 80 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR BASE STATION CHANGE OF PACKET SWITCHED COMMUNICATIONS IN A MOBILE COMMUNICATIONS SYSTEM.

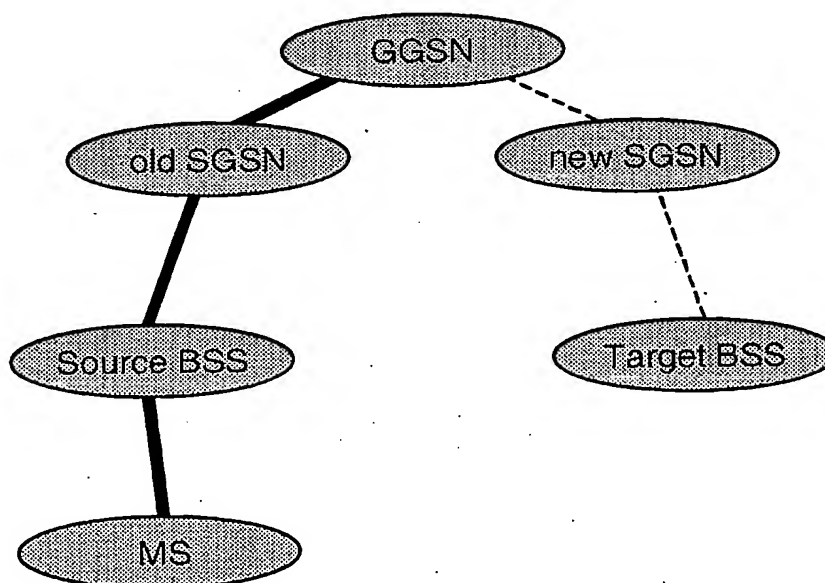

(57) Abstract: The present invention relates to change of base stations transferring packet switched communications between a mobile station and a support node. The base station change is of lossless type allowing lossless base station change of packet switched communications in unacknowledged mode between the mobile station and the support node.

WO 2005/074308 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM,

SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Method and system of radio communications

TECHNICAL FIELD OF THE INVENTION

The present invention relates to communications. More especially it relates to packet data communications over radio links and change of base station. Particularly it relates to base station handover of packet switched communications in GPRS (General Packet Radio System) and UMTS (Universal Mobile Telecommunications System) communications.

10 BACKGROUND AND DESCRIPTION OF RELATED ART

Packet Radio Services offers packet switched communications over radio links in e.g. GPRS and UMTS. Data is disassembled and transmitted in packets or Protocol Data Units (PDUs). Upon reception, the PDUs are reassembled.

15 Figure 1 illustrates protocol layers for GERAN (GSM-EDGE Radio Access Network) A/Gb mode and will be explained in some detail below. All functions related to transfer of Network layer Protocol Data Units, N-PDUs, shall be carried out in a transparent way by the GPRS network entities.

20 3rd Generation Partnership Project (3GPP): *Technical Specification Group GERAN, Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); Overall description of the GPRS radio interface; Stage 2 (Release 4), 3GPP TS 43.064 V4.3.0, France, February 2002,*
25 provides the overall description for lower-layer functions of GPRS and EGPRS (Enhanced GPRS) radio interface, Um. In the sequel GPRS refers to both GPRS and EGPRS in not explicitly stated otherwise. An EGPRS mobile/base station is a GPRS compliant mobile/base station with additional capabilities for enhanced radio access protocol features and
30

enhanced modulation and coding schemes. The support of EGPRS is optional for mobile station and network.

3rd Generation Partnership Project (3GPP): *Technical Specification Group GSM/EDGE Radio Access Network; General Packet Radio Service (GPRS); Mobile Station (MS) - Base Station System (BSS) interface; Radio Link Control/Medium Access Control (RLC/MAC) protocol (Release 4)*, 3GPP TS 44.060 V4.8.0, France, September 2002, specifies the procedures used at the radio interface for the General Packet Radio Service, GPRS, Medium Access Control/Radio Link Control, MAC/RLC, layer. The RLC/MAC function supports two modes of operation:

- unacknowledged operation; and
- acknowledged operation.

Section 9.3 describes operation during RLC data block transfer. RLC acknowledged mode, RLC-AM, operation uses retransmission of RLC data blocks to achieve high reliability. RLC unacknowledged mode, RLC-UM, operation does not utilize retransmission of RLC data blocks.

3rd Generation Partnership Project (3GPP): *Technical Specification Group Radio Access Network, Physical Layer Procedures*, 3G TS 25.322 v3.5.0, France, December 2000, specifies three data transfer services of radio link control, RLC:

- transparent data transfer service,
- unacknowledged data transfer service, and
- acknowledged data transfer Service

Subsections 4.2.1.1 and 4.2.1.2 describe transparent mode entities and unacknowledged mode entities. One difference of the two modes resides in management of packet overhead.

In transparent mode no overhead is added or removed by RLC. In subsection 4.2.1.3 an acknowledged mode entity, AM-entity, is described (see figure 4.4 of the 3GPP Technical Specification). In acknowledged mode automatic repeat request, ARQ, is used. The RLC sub-layer provides ARQ functionality closely coupled with the radio transmission technique used.

3rd Generation Partnership Project (3GPP): *Technical Specification Group Core Network; Digital cellular telecommunications system (Phase 2+); Mobile Station (MS) - Serving GPRS Support Node (SGSN); Subnetwork Dependent Convergence Protocol (SNDCP) (Release 5)*, 3G TS 44.065 v5.1.0, France, September 2003, provides a description of the Subnetwork Dependent Convergence Protocol, SNDCP, for GPRS. SNDCP entity performs multiplexing of data coming from different sources to be sent using service provided by the LLC (Logical Link Control) layer,

3rd Generation Partnership Project (3GPP): *Technical Specification Group Core Network; General Packet Radio Service (GPRS); GPRS Tunnelling Protocol (GTP) across the Gn and Gp interface (Release 5)*, 3GPP TS 29.060 V5.8.0, France, December 2003, defines the second version of GTP used on:

- the Gn and Gp interfaces of the GPRS;
- the Iu, Gn and Gp interfaces of the UMTS.

Within GPRS (and UMTS) Gn interface is an interface between GPRS Support Nodes (GSNs) within a PLMN and Gp interface is an interface between GPRS Support Nodes (GSNs) of different PLMNs. In UMTS Iu interface is an interface between RNC and Core Network.

A Gb interface is an interface between an SGSN (Serving GPRS Support Node) and a BSC (Base Station Controller). An

A interface is an interface between BSC and MSC (Mobile Services Switching Center).

GPRS Tunneling Protocol, GTP, is the protocol between GPRS Support Nodes, GSNs, in the UMTS/GPRS backbone network.

5 GTP allows multi-protocol packets to be tunneled through the UMTS/GPRS Backbone between GSNs and between SGSN (Serving GSN) and UTRAN (Universal Terrestrial Radio Access Network).

10 3rd Generation Partnership Project (3GPP): *Technical Specification Group Core Network; Mobile Station - Serving GPRS Support Node (MS-SGSN); Logical Link Control (LLC) layer specification; (Release 4), 3GPP TS 44.064 V4.3.0, France, March 2002*, defines the Logical Link Control, LLC, layer protocol to be used for packet data transfer between the
15 Mobile Station, MS, and Serving GPRS Support Node, SGSN. LLC spans from the MS to the SGSN. LLC is intended for use with both acknowledged and unacknowledged data transfer.

LLC supports two modes of operation:

- 20 - Unacknowledged peer-to-peer operation, LLC-UM,
and
- Acknowledged peer-to-peer operation, LLC-AM.

In unacknowledged operation logical link entity may initiate transmissions to a peer entity without prior establishment of a logical connection with the peer entity. LLC does
25 not guarantee in-order delivery. LLC can detect errors in a received frame, and, depending on whether the frame is sent in protected mode or not, either discard or deliver the erroneous frame. No error recovery procedures are defined at the LLC layer. Higher-layer protocols can be used
30 to provide reliability, if needed. This mode of operation is known as Asynchronous Disconnected Mode, ADM.

With acknowledged operation a balanced data link involves two participating entities, and each entity assumes responsibility for the organization of its data flow and for error recovery procedures associated with the transmissions that it originates. Each entity operates as both a data source and data sink in a balanced link, allowing information to flow in both directions. This mode of operation is known as Asynchronous Balanced Mode, ABM, and provides a reliable service with in-order delivery.

10 *European Patent Application EP1318691* describes a method for informing the SGSN about a mobile station cell-change operation in the GPRS.

International Patent Application WO03032672 discloses a method of optimization of handover procedures in GPRS comprising the old SGSN sending identification response directly to the new SGSN.

International Patent Application WO0079808 claims a method of reducing delay time for a mobile station being handed over from an old SGSN to a new SGSN during a call handling a real-time payload in a GPRS packet switched radio telecommunications network comprising shortening the inter-SGSN Routing Area Update interruption interval and implementing low latency requirements and shaping of packet traffic.

International Patent Application WO02085048 describes a handover procedure for use in a GPRS network, reducing the need for re-sequencing in SGSN. Old SGSN sends a message to GGSN (Gateway GSN) requesting data transmission to stop. Data at old SGSN, for transmission to MS, is transferred to new SGSN and transmission from GGSN is resumed when handover is complete. GGSN then transmits data to new SGSN.

In U.S. Patent Application US20010019544 the GGSN and SGSN are allowed to finish up on-going transactions before moving the context to the new SGSN. The first (old) SGSN is operating as a temporary anchor in response to an inter-SGSN routing area update.

European Patent Application EP1345463 reveals buffering of TCP packets in a mobile node during handover.

Figure 2 illustrates schematically some network elements involved in packet switched handover. A source SGSN «source SGSN» connected to a gateway GSN «GGSN» supports data traffic to a mobile station «MS» via a source base station subsystem «source BSS». A base station change may be initiated, e.g. as the mobile station moves, towards a base station of a target base station subsystem «target BSS» supported by a target SGSN «target SGSN».

In prior art lossy type of packet switched handover is used for services requiring short delay but allowing some data loss at cell change, e.g. speech services. For lossy handover downlink data is typically duplicated by the source SGSN and sent both to the source BSS for further transmission to the mobile station in the current cell, and to the target SGSN «target SGSN».

The target side (BSS/SGSN) can either discard the forwarded data until the MS has indicated its presence in the target cell or, blindly, send the data without information available on whether or not the MS is present in the target cell. In case of blindly sending the data, the mobile station has been ordered to perform the handover and has synchronized towards the target cell, the downlink data flow is already ongoing and the mobile station can immediately start the uplink data flow. No acknowledgement of received data is required, neither in uplink nor in downlink.

According to prior art solutions, data losses will occur, e.g., when data packets sent to source BSS from source SGSN are discarded in source BSS when a mobile station is handed over from source BSS to target BSS. Losses will also occur if e.g. packet data forwarded to MS via the target SGSN and target BSS experiences a delay that is less than the delay associated with the MS processing the handover command and acquiring synchronization.

Lossless type of packet switched handover, PS handover, is used for services that are sensitive to data losses but can accept a certain delay. The typical characteristics of a lossless handover are currently based on acknowledged RLC and LLC protocols and the SNDCP protocol operating in acknowledged mode. During the PS handover the downlink data flow is forwarded from the source SGSN to the target SGSN. The target SGSN buffers the downlink data until the mobile station has indicated its presence in the target cell. The SNDCP layer at both the MS and SGSN assigns N-PDU Send number to each N-PDU sent and maintains N-PDU Receive number for each received N-PDU for any given bi-directional packet service. When a handover is performed of such a service the number of the next expected uplink and downlink N-PDU is exchanged between the MS and the SGSN in handover signaling messages allowing precise knowledge of where packet data transmission should resume after handover.

None of the cited documents above discloses lossless packet switched base station handover or radio cell change in LLC unacknowledged mode, LLC-UM.

SUMMARY OF THE INVENTION

Packet switched base station handover according to the invention is associated with cell change both within GERAN and between GERAN and UTRAN. According to the invention

the cell reselection time can be reduced. Also, due to the invention allowing operating, particularly LLC, in unacknowledged mode, link delay can be reduced during an entire data transfer session. This is particularly the case for
5 base station handover in RLC-UM and LLC-UM.

Handover for which data losses may occur is known as lossy handover. For packet data communications with strict delay requirements lossless handover according to prior art is not always feasible due to its imposed additional delay
10 caused by acknowledgements and retransmissions. The delay introduced by particularly LLC protocol layer in acknowledged mode affects higher layer operations, e.g. TCP based services with a resulting throughput deterioration due to TCP congestion control erroneously interpreting the addi-
15 tional delay as channel congestion. Presently the only packet switched handover solution offered for delay sensitive applications, when LLC-AM is excluded, is lossy handover. Lossless packet switched handover can, according to prior art, only be achieved by operating LLC/SNDCP in
20 acknowledged mode, which will increase overhead, add delay and reduce overall throughput.

Consequently, there is a need of reducing data transfer delay and control signaling, without risking packet losses due to packet switched handover.

25 It is consequently an object of the present invention to reduce data transfer delay without packet losses due to handover.

A further object is to reduce packet switched data transfer overhead without packet losses due to handover.

It is also an object not to require LLC-AM as a means for reducing the risk of data losses at packet switched handover.

5 Another object is to circumvent throughput reduction due to handover.

Finally, it is an object of the present invention to enhance LLC/SNDCP protocols to provide lossless handover with LLC/SNDCP operating in unacknowledged mode.

10 These objects are met by a method and system of lossless base station handover for packet switched communications not requiring LLC/SNDCP to operate in acknowledged mode during the complete data transfer session.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Figure 1 illustrates protocol layers for GERAN (GSM-EDGE Radio Access Network) A/Gb mode, according to prior art.

Figure 2 illustrates schematically some network elements involved in packet switched handover.

20 Figure 3 illustrates an outline of a signaling diagram associated with an example PS handover according to a mode of the invention.

DESCRIPTION OF PREFERRED EMBODIMENTS

To handle handover of packet services that require a minimum of packet loss it is currently possible to operate both the RLC and the LLC/SNDCP protocols in acknowledged mode.
25 However this is not desirable as with these two protocols operating in acknowledged mode a certain amount of delay will be introduced whenever retransmission is determined to be necessary at any of these layers. The delay introduced especially when retransmission occurs at the LLC layer may

impact higher layer operation, e.g. for TCP based services where a protocol stack consisting of TCP/IP/SNDCP/LLC/RLC is used, with the net result being a major reduction in throughput temporarily being experienced by the affected packet service. This extra delay will impose a lowered quality of service as perceived by the user. In addition, operating these two protocols in acknowledged mode will result in increased overhead used for control plane functions, and therefore renders less bandwidth available to user plane payload.

Today's streaming services are normally implemented operating RLC in acknowledged mode and LLC/SNDCP in unacknowledged mode, which allows for eliminating the potential for serious delay problems as described above. However, this approach has the problem of not being able to support lossless packet service for the case where MS mobility involves a change of radio cell/base station and SGSN.

Packet switched base station handover according to the invention is associated with radio cell change both within GERAN and between GERAN and UTRAN.

To minimize potential delay and extra overhead as would result if operating the LLC/SNDCP protocols in acknowledged mode, for all packet flows subject to lossless packet-switched handover, PS handover, and to be compliant with the principles used for lossless data transfer in UTRAN, the following embodiments are identified:

- new mode of operation for SNDCP
- management of downlink Status with/without Source BSS assistance, and
- management of uplink status with/without source BSS assistance.

They are preferably combined. The packet loss during hand-over is minimized without requiring LLC/SNDCP protocols to operate in acknowledged mode during an entire data transfer session. Thereby higher user data rates are achieved during the entire data transfer session.

New Mode of Operation for SNDCP

The SNDCP protocol is modified to support a new mode of operation where it operates with both N-PDU Send and Receive Sequence numbers combined with the LLC protocol operating in unacknowledged mode. This means that the SNDCP protocol entities in the mobile station and in the network shall each maintain a Send and a Receive N-PDU Sequence number and also GTP T-PDU uplink and downlink sequence numbers for each packet flow subject to lossless PS handover. This sequence number information is forwarded from the source SGSN to the target SGSN so that a SNDCP engine started in the target SGSN can maintain sequence number continuity with the SNDCP engine used in the source SGSN. The downlink N-PDU sequence number and the downlink GTP T-PDU numbers are provided along with each N-PDU forwarded from the source SGSN to the target SGSN.

Management of Downlink Status With Source BSS Assistance

The downlink LLC data buffered in the source BSS that has not yet been sent to or acknowledged by the mobile station (at the RLC layer) at the point of time when the source BSS sends the PS handover command message to the MS can be deleted and a status message sent back to the source SGSN telling it how many LLC PDUs were deleted for each packet flow subject to lossless PS handover.

Alternatively, the status message sent from the source BSS to the source SGSN could provide parts of the deleted LLC

PDUs, e.g. the LLC header, or even the complete LLC PDUs. This means that SN-UNITDATA PDUs previously sent down to LLC at the source SGSN and relayed to the source BSS as segmented LLC PDUs will either be explicitly returned to the source SGSN or referenced in such a way to allow the source SGSN to determine which N-PDUs have not been sent to the MS, i.e. which whole N-PDUs have been acknowledged by the MS on RLC layer.

The Send N-PDU sequence numbers determined by the source SGSN are then forwarded in a message to the target SGSN. Upon MS arrival in the target cell the target SGSN can start transmitting the next downlink N-PDU expected by the MS for each packet flow subject to lossless PS handover. The MS can detect duplications of downlink N-PDUs since the sequence number used at the target SGSN is based on the sequence number used by source SGSN and it is included in the header of each N-PDU sent from the target SGSN.

For this embodiment it is required that the source SGSN supports N-PDU buffering if downlink N-PDUs are to be forwarded to the target SGSN in their correct order or the source BSS sends a status message that does not contain complete LLC PDUs. If the target SGSN can accept N-PDUs that are out of order and the status message sent by the source BSS contains complete LLC PDUs then the source SGSN need not support N-PDU buffering.

Management of Downlink Status Without Source BSS Assistance

In this embodiment the source SGSN can only estimate the Send N-PDU sequence numbers based on the delay attribute (with sufficient margin added) associated with each packet flow subject to lossless PS handover and forward these estimates to the target SGSN.

Source BSS buffers has downlink LLC data not yet sent to or acknowledged by the mobile station (at the RLC layer) at the point of time when the source BSS sends the PS handover command message to the MS. The source BSS sends the PS
5 handover command message to the MS. Thereafter it sends a status message back to the source SGSN only indicating that the MS has been sent a PS handover command message (i.e. no downlink status is included in the message).

If upon arrival in the target cell, the MS does not send
10 the network a message that provides downlink sequence number status for all packet flows subject to lossless PS handover, the target SGSN has no choice but to use the estimated Send N-PDU sequence numbers provided by the source SGSN. This may result in the target SGSN sending multiple
15 downlink N-PDUs already received by the MS. However, the MS can once again detect duplications of downlink N-PDUs since the sequence number is included in the header of each SN-UNITDATA PDU used to transit each N-PDU.

If upon arrival in the target cell, the MS sends the net-
20 work a message that provides downlink sequence number status for all packet flows subject to lossless PS handover, the target SGSN will have exact knowledge as to which downlink N-PDU to begin sending for each packet flow. The target SGSN deletes all downlink N-PDUs forwarded from the
25 source SGSN that are implicitly acknowledged by the downlink sequence number status provided by the MS upon arrival in the target cell.

The embodiment requires that the source SGSN supports N-PDU buffering since a minimum set of downlink N-PDUs sent down
30 to the source BSS must be buffered for each packet flow subject to lossless PS handover. The quantity of N-PDUs

buffered for a given packet flow can be determined by, e.g., the delay attribute associated with that packet flow.

Management of Uplink Status With Source BSS Assistance

When the source BSS receives the PS handover command message from the source SGSN it will at a point of time stop
5 acknowledging RLC packets in the uplink. When this occurs it will send a status message to the source SGSN indicating that no more uplink LLC PDUs will be forwarded to it. The source SGSN can then determine the Receive N-PDU sequence
10 numbers for all uplink packet flows subject to lossless PS handover and include them in a message to the target SGSN. After notifying the source SGSN, the source BSS will send the PS handover command message to the MS.

The PS handover command message may contain an up to date
15 RLC ACK/NACK report allowing the MS to determine which N-PDUs have been completely received by the network. The MS will start uplink transmission upon arrival in the target cell from the next uplink N-PDU that was not acknowledged by lower layers in the old cell. This N-PDU should always
20 correspond to the next uplink N-PDU expected by the target SGSN for each packet flow subject to lossless PS handover.

Alternatively, the PS handover command message may not include an RLC ACK/NACK report or any other indication of uplink status that the MS could use to determine the Send
25 N-PDU sequence number for the packet flows subject to lossless PS handover. The MS will therefore start uplink transmission upon arrival in the target cell from what is estimated next uplink N-PDU that was not acknowledged by lower layers in the old (source) cell. In this case the
30 first N-PDU sent by the MS in the new cell may not correspond to the next uplink N-PDU expected by the target SGSN. However, since the N-PDU sequence number is included in the

header of each SN-UNITDATA PDU used to transmit each N-PDU the target SGSN will be able to remove any duplication.

For both alternatives the source BSS is considered to have provided assistance to the source SGSN in that a status message is sent. The message indicates that the source BSS has stopped acknowledging RLC packets in the uplink and that no more uplink LLC PDUs will be forwarded to it.

Management of Uplink Status Without Source BSS Assistance

The PS handover command message may be sent from the source SGSN to the source BSS and include the expected Receive N-PDU sequence Number that the MS should start transmission with in the target cell for each uplink packet flow subject to lossless handover. This sequence number information is provided by the source SGSN without conferring with the source BSS as to whether or not it has stopped acknowledging RLC data in the uplink. As such, additional uplink LLC PDUs may be acknowledged by the source BSS prior to the PS handover command message being sent to the MS and may therefore result in a conflict with the Send N-PDU sequence number as viewed by the MS. In this case the MS must always accept the uplink sequence number information provided in the PS handover command message over the uplink sequence number information derived from local RLC operation. This means that the MS must always buffer some uplink N-PDUs that have already been confirmed according to RLC. The quantity of these N-PDUs that need to be buffered is expected to be small.

According to the invention a sequence tracking mode, STM, is defined for Sndcp. In STM, the Sndcp entities in the SGSN and in the MS shall always keep track of the uplink and downlink N-PDU sequence numbers corresponding to Sndcp in LLC-AM. Further, in STM uplink and downlink G-PDU se-

quence numbers associated with uplink and downlink N-PDUs are recorded corresponding to SNDCP in LLC-AM. Also, in STM SNDCP entities in SGSN and in MS shall make use of SN-UNITDATA PDUs corresponding to SNDCP in LLC-UM and SNDCP shall maintain sequence number continuity when PS handover occurs across SGSN.

An additional case is where the PS handover command sent to the MS does not include any Receive N-PDU numbers for any of the uplink packet flows subject to lossless PS handover. In this case the MS will use its local knowledge of uplink status which may lead to a duplicated uplink N-PDU being sent by the MS in new (target) cell. Since this duplication will be deleted by the target SGSN, since N-PDU sequence number continuity is supported across SGSNs, it will not be a problem.

Figure 3 illustrates an outline of a signaling diagram associated with an example PS handover according to a mode of the invention. In the example LLC operates in unacknowledged mode LLC-UM, even if the invention is applicable also in acknowledged mode, LLC-AM.

The signaling of figure 3 is initiated by an MS having one or more ongoing packet flows subject to lossless PS handover when the source BSS determines that a PS handover is required «1». RLC is operating in acknowledged mode, LLC is operating in unacknowledged mode and SNDCP is operating in sequence tracking mode, STM. Thereby N-PDU sequence numbering is managed as if LLC were operating in acknowledged mode. Therefore SNDCP entities in MS and network has to manage two sequence parameters for each packet flow subject to lossless PS handover, the Send N-PDU and the Receive N-PDU sequence numbers.

In STM SNDCP shall use SN-UNITDATA PDUs as with LLC-UM. For each packet flow subject to lossless PS handover the source SGSN buffers a set of downlink N-PDUs that reflects the delay attribute associated with that packet flow. As a
5 non-exclusive example the N-PDUs received from the GGSN during the running latest 500 ms are buffered.

The source BSS sends a PS Handover Required message «2» to the source SGSN.

The source SGSN sends a Prepare PS Handover Request message
10 to the target SGSN «3».

The target SGSN sends a PS Handover Request message «4» to the target BSS. The target BSS pre-allocates radio resources, if available, to the requested flows and sends a PS Handover Request Acknowledge message «4'» back to the
15 target SGSN.

The target SGSN sends a Prepare PS Handover Response message to the source SGSN «5». This message indicates that the SGSN is now ready to receive downlink data forwarded from the source SGSN. When source SGSN receives the Pre-
20 pare PS Handover Response message «5» it

- stops sending downlink data to the source BSS,
- sends the PS Handover Command message «6» to the source BSS containing among other things the N-PDU Receive Sequence number of the next
25 expected uplink N-PDU to be received for each packet flow subject to lossless PS handover,
- starts forwarding to the target SGSN all buffered downlink N-PDUs received from the GGSN prior to the arrival of the Prepare PS Handover
30 Response message from the target SGSN, and

- starts forwarding to the target SGSN downlink N-PDUs received from the GGSN after the arrival of the Prepare PS Handover Response message from the target SGSN «9».

5 Each downlink N-PDU forwarded to the target SGSN «9» contains an associated Send N-PDU sequence number and a GTP sequence number. The target SGSN starts buffering of the forwarded downlink N-PDUs until the MS indicates its presence «7» in the target cell by sending a PS Handover Complete message to the target SGSN «7», «10».

When the source BSS receives the PS Handover Command «6» it

- immediately stops reception and acknowledgement of data in the uplink;
- stops transmission of downlink data towards the MS but may terminate transmission at an LLC PDU boundary without waiting for an acknowledgement;
- sends a Forward BSS Context message to the source SGSN, the message not including information on which buffered downlink LLC-PDUs has been discarded;
- sends a PS Handover Command «7» to the MS ordering the MS to a new target cell; the message including Receive N-PDU (uplink) sequence number of the next expected N-PDU to be received as viewed by the source SGSN for each packet flow subject to lossless PS handover;

When the MS has reconfigured itself and acquired synchronization in the new cell, it sends a PS Handover Complete message to the target BSS «7'». This message includes the sequence number of the next expected downlink N-PDU to be

received (as viewed by MS) for each downlink packet flow subject to lossless PS handover.

The source BSS then sends a Forward BSS Context message «8» to the source SGSN indicating that the BSS has ordered the MS to the new cell. The message comprises no send buffer status information that the source SGSN could make use of for determining the precise status of transmitted downlink N-PDUs before starting forwarding data to the target SGSN.

Upon receiving the Forward BSS Context message «8», the source SGSN determines the following values for each packet flow subject to lossless PS handover and forwards this information to the target SGSN in the Forward SRNS Context message «9»:

- Downlink N-PDU Send sequence number for the next downlink N-PDU to be sent to the MS,
- Downlink GTP-U sequence number for the next downlink GTP-U T-PDU to be relayed to the target SGSN,
- Uplink N-PDU Receive sequence number for the next uplink N-PDU to be received from the MS, and
- Uplink GTP-U sequence number for the next uplink GTP-U T-PDU to be sent from the target SGSN to the GGSN.

Prior to receiving the Prepare PS Handover Response message «5» the source SGSN was buffering downlink N-PDUs according to the delay attributes of the packet flows subject to lossless PS handover. Since the Forward BSS Context message «8» received from the source BSS does not include downlink status information, the source SGSN selects values for the two downlink sequence numbers listed above that re-

flect the oldest buffered downlink N-PDU for each of the packet flows subject to lossless PS handover. I.e. a worst case scenario is anticipated and corresponding values selected.

5. Upon receiving the Forward SRNS Context message, the target SGSN sends a Forward SRNS Context Acknowledge message «9'» back to the source SGSN.

Thereafter the target BSS sends a PS Handover Complete message «10» to target SGSN. The PS Handover Complete message
10 «10» includes the sequence number of the next expected downlink N-PDU to be received (as viewed by MS) for each packet flow subject to lossless PS handover.

The target SGSN can now start sending the buffered downlink data starting with the next downlink N-PDU expected by the
15 MS for each packet flow subject to lossless PS handover. The downlink sequence number status information provided in the PS Handover Complete message «12» allows the target SGSN to:

- 20 - delete all downlink N-PDUs forwarded from the source SGSN that are implicitly acknowledged by the downlink sequence number status information, and
- ignore downlink sequence number status information provided by the source SGSN in the Forward
25 SRNS Context message «9».

The target SGSN sends a PS Handover Complete message «12» to the source SGSN, which acknowledges the completion of the handover procedure by responding with a PS Handover Complete Acknowledge message «12'» back to target SGSN.
30 Target SGSN sends an Update PDP Context Request to the GGSN «13». The GGSN updates its PDP context fields and return

an Update PDP Context Response message «13'». SGSN initiates Packet Flow Procedures to release resources in the source BSS «14». Finally, MS and target SGSN perform routing area update procedure «15».

- 5 The example signaling described above in relation to figure 3 illustrates a method and system where source SGSN provides the MS with the sequence number of the next expected uplink N-PDU to be received in the PS Handover Command «6», «7». (Management of uplink status is provided without in-
10 formation processing of source BSS.)

- MS preferably provides the network with the sequence number of the next expected downlink N-PDU to be received in the PS Handover Complete message «7'», «10». (Management of downlink status is provided without information processing
15 of source BSS).

- SNDCP entities in the source SGSN preferably support some buffering of downlink N-PDUs. The source SGSN then buffers an amount of N-PDUs corresponding to the delay attribute of the associated packet flow. Upon completion of the PS
20 handover preparation phase all such buffered N-PDUs can be forwarded to the target SGSN to ensure all forwarded N-PDUs arrive in correct order. Downlink N-PDUs received from the GGSN after PS handover preparation is completed will be sent to the target SGSN after the buffered downlink N-PDUs
25 are forwarded. Upon MS arrival to the new cell, the target SGSN discovers the downlink status of the packet flows, e.g. via information provided in the PS Handover Complete message «10», begins transmitting the appropriate downlink N-PDU for each packet flow subject to lossless PS handover
30 and deletes all implicitly confirmed downlink N-PDUs received from the source SGSN.

In SNDCP STM, SNDCP entities in the target SGSN will be required to support some buffering of downlink N-PDUs. This is necessary as lossless operation requires that the target SGSN be informed of the presence of the MS in the new cell
5 before it can begin downlink transmission of packet data.

The source BSS also supports buffering which allows it the option of attempting to empty downlink buffers upon receiving a PS Handover Command «6» from the source SGSN.

In SNDCP STM, SNDCP entities in MS will be required to
10 buffer the uplink N-PDUs beyond the point where their associated RLC/MAC entities acknowledges the complete transmission of any given LLC PDU. This is necessary for the example signaling where management of uplink status is provided without information processing of source BSS. This buffering
15 ing allows source BSS the option of continued reception of uplink data when attempting to empty downlink buffers upon reception of a PS Handover Command «6» from the source SGSN.

The example described in relation to figure 3 is just an
20 example. It illustrates, e.g., source SGSN and target SGSN as separate entities (inter SGSN PS handover). However, the invention also covers intra SGSN PS handover between base stations. Also, in figure 3 signaling for one single radio access technology, RAT, is illustrated. Though, the
25 same principles are valid also for inter RAT PS handover, such as for PS handover between base stations of GERAN and UTRAN respectively.

Figure 4 illustrates a simplified block diagram of a mobile station according to the invention. The mobile station
30 comprises processing means « μ_{MS} » operating according to one or more protocols for communicating protocol data units as described above. Receive means « R_{MS} » receives information

from the communications network to which the mobile station is connected. The receive means are connected to the processing means $\langle\mu_{MS}\rangle$ and receives, e.g., information from the communications network on next expected uplink protocol data unit at handover. Buffer means $\langle B_{MS}\rangle$ buffers uplink protocol data units, N-PDUs, as described above.

Figure 5 displays schematically a block diagram of a support node, such as a Serving GPRS Support Node, SGSN, according to the invention. The support node comprises processing means $\langle\mu_{SN}\rangle$ operating according to one or more protocols for communicating packet switched data as described above. Receive means $\langle R_{SN}\rangle$ receives protocol data units from one or more respective mobile stations on next expected downlink protocol data unit, N-PDU. Transmit means $\langle T_{SN}\rangle$ transmits protocol data units to the one or more mobile stations which are communicating packet switched data over the SGSN. Buffer means $\langle B_{SN}\rangle$ buffers downlink N-PDUs.

Figure 6 depicts a schematic block diagram of a base station entity according to the invention. The base station entity comprises receive means $\langle R_{BS}\rangle$, transmit means $\langle T_{BS}\rangle$ and buffer means $\langle B_{BS}\rangle$. The receive means $\langle R_{BS}\rangle$ receiving one or more commands of base station change as decided by network to which the base station entity is connected. Also, receive means receives $\langle R_{d,BS}\rangle$ that is not necessarily identical to receive means $\langle R_{BS}\rangle$, receives uplink data from one or more mobile stations communicating packet switched data via the base station entity. The transmit means $\langle T_{BS}\rangle$ transmits protocol data units to one or more mobile stations communicating packet switched data via the base station entity.

A person skilled in the art readily understands that the properties of an SGSN, a GGSN, a BSS, a base station or an

MS are general in nature. The use of concepts such as SGSN or MS within this patent application is not intended to limit the invention only to devices associated with these acronyms. It concerns all devices operating correspond-

5 ingly, or being obvious to adapt thereto by a person skilled in the art, in relation to the invention. As an explicit non-exclusive example the invention relates to mobile equipment without a subscriber identity module, SIM, as well as mobile stations including one or more SIMs.

10 Further, protocols and layers are referred to in close relation with GPRS, UMTS and Internet terminology. However, this does not exclude applicability of the invention in other systems with other protocols and layers of similar functionality.

15 The invention is not intended to be limited only to the embodiments described in detail above. Changes and modifications may be made without departing from the invention. It covers all modifications within the scope of the following claims.

CLAIMS

1. A method of base station change, the base station transferring packet switched communications between a mobile station and a support node, the method characterized in that the base station change is of lossless type allowing lossless base station change of packet switched communications in unacknowledged mode between the mobile station and the support node.
5
2. The method according to claim 1 characterized in that a protocol entity maintains N-PDU send and receive sequence numbers, and GTP T-PDU uplink and downlink sequence numbers for each packet flow subject to base station change of lossless type, the support node acting as source support node during the base station change, forwarding maintained sequence number information to a target support node of the base station change.
10 15
3. The method according to claim 2 characterized in that downlink N-PDU and downlink GTP T-PDU sequence numbers are provided along with each N-PDU forwarded from the source support node to the target support node.
20
4. The method according to claim 2 characterized in that LLC data buffered in source BSS that has not been sent to, or acknowledged by, the mobile station at the point in time when the source BSS sends the PS handover command message to the mobile station is deleted.
25
5. The method according to claim 4 characterized in that a status message is sent back to the source support node telling it how many LLC PDUs have been deleted.

6. The method according to claim 5 characterized in that the status message provides part of the one or more deleted LLC PDUs.
7. The method according to claim 6 characterized in that the status message provides the header of the one or more deleted LLC PDUs.
8. The method according to claim 2 characterized in that a set of N-PDUs sent down to the source BSS are buffered in the support node for each packet flow subject to lossless PS handover.
9. The method according to claim 2 characterized in that a PS handover command message contains an RLC ACK/NACK report allowing a mobile station to determine which one or more N-PDUs have been completely received by the network.
10. The method according to claim 2 characterized in that a mobile station starts uplink transmission upon handover to a target cell, by an estimated next uplink N-PDU that was not acknowledged by lower layers in a source cell from which the mobile station was handed over to the target cell.
11. The method according to claim 2 characterized in that a PS handover command sent from the support node to a source BSS includes expected Receive N-PDU sequence number, at which a mobile station should start transmission in a target cell for each uplink packet flow subject to lossless handover.
12. The method according to claim 2 characterized in that a mobile station buffers one or more uplink N-PDUs which have been confirmed according to RLC.

13. The method according to claim 2 characterized in that uplink and downlink G-PDU sequence numbers associated with uplink and downlink N-PDUs are recorded while in unacknowledged mode between the mobile station and the support node.

14. The method according to claim 1 characterized in that the base station change allows an entire data transfer session in unacknowledged mode.

15. The method according to claim 14 characterized in that the data transfer session is a session of data file transfer.

16. The method according to claim 1 characterized in that the packet switched communications in unacknowledged mode between the mobile station and the support node concerns unacknowledged mode of LLC protocol.

17. The method according to claim 1 comprising a mode of operation characterized by recording one or more sequence numbers of one or more protocol data units in both uplink and downlink.

18. The method according to claim 17 characterized in that the protocol data units are N-PDUs.

19. The method according to claim 17 characterized in that the protocol data units are G-PDUs.

20. The method according to claim 1 characterized in that SNDCP sequence continuity is maintained across a support node involved in packet switched base station change.

21. The method according to claim 1 characterized in that one or more SN-UNITDATA protocol data unit includes one or more N-PDU.
22. The method according to claim 21 characterized in that N-PDU number is included in a header of SN-UNITDATA protocol data unit.
23. The method according to claim 1 characterized in that a support node connected to a source base station or base station subsystem to be changed informs a mobile station, also connected to the base station or base station subsystem, on a next expected uplink protocol data unit to be received.
24. The method according to claim 1 characterized in that a mobile station connected to a source base station or base station subsystem to be changed informs a source support node, also connected to the base station or base station subsystem, on a next expected downlink protocol data unit to be received.
25. The method according to claim 23 or 24 characterized in that the base station or base station subsystem relays the information between mobile station and support node with no required processing of the information.
26. The method according to any of claims 23-25 characterized in that the source base station or base station subsystem is allowed to continue receiving uplink data while emptying downlink buffers as a response to a PS Handover Command.
27. The method according to any of claims 1-26 characterized in that the protocol data units are compliant with Sub-Network Dependent Convergence Protocol.

28. The method according to claim 27 c h a r a c t e r -
i z e d i n that SNDCP entities in a source support node
buffers one or more downlink N-PDUs.

5 29. The method according to claim 28 c h a r a c t e r -
i z e d i n that the source support node buffers a number
of N-PDUs corresponding to the delay attribute of the asso-
ciated packet flow.

30. The method according to claim 29 c h a r a c t e r -
i z e d i n that the buffered N-PDUs are forwarded to a
10 target support node during the base station change.

31. The method according to claim 30 c h a r a c t e r -
i z e d i n that the received forwarded N-PDUs in target
support node are forwarded to the mobile station.

32. The method according to claim 31 c h a r a c t e r -
15 i z e d i n that the one or more N-PDUs are forwarded to
the mobile station when the support node has received a PS
Handover Complete message.

33. The method according to claim 27 c h a r a c t e r -
i z e d i n that one or more downlink N-PDUs are buffered
20 in SNDCP entities in a target support node.

34. The method according to claim 33 c h a r a c t e r -
i z e d i n that the target support node buffers a number
of uplink N-PDUs corresponding to the number of N-PDUs
received from the source support node.

25 35. The method according to claim 27 c h a r a c t e r -
i z e d i n that one or more uplink N-PDUs are buffered
in SNDCP entities in a mobile station.

36. The method according to claim 35 c h a r a c t e r -
i z e d i n that the mobile station buffers a number of

N-PDUs corresponding to the maximum delay of RLC/MAC acknowledgement of transmission of LLC PDU.

37. A mobile station for packet switched communications communicating over a communications network including base stations and one or more support nodes, the mobile station
5 c h a r a c t e r i z e d b y processing means operating according to one or more protocols receiving protocol data units, the processing means extracting information for the mobile station to inform the network of next expected down-
10 link protocol data unit in association with packet switched base station change allowing lossless base station change of packet switched communications.

38. A mobile station for packet switched communications communicating over a communications network including base
15 stations and one or more support nodes, the mobile station c h a r a c t e r i z e d b y processing means operating according to one or more protocols transferring protocol data units and receiver receiving informing from the network on next expected uplink protocol data unit in associa-
20 tion with packet switched base station change allowing lossless base station change of packet switched communications.

39. The mobile station according to claim 37 or 38 c h a r a c t e r i z e d i n that the protocol data
25 units are compliant with Sub-Network Dependent Convergence Protocol.

40. The mobile station according to claim 39 c h a r a c t e r i z e d b y a buffer for buffering one or more uplink N-PDUs which have been confirmed according to RLC.

30 41. The mobile station according to claim 40 c h a r a c t e r i z e d i n that the mobile station starts

uplink transmission upon handover to a target cell, by transmitting an estimated next uplink N-PDU that was not acknowledged by lower layers in a source cell from which the mobile station was handed over to the target cell.

- 5 42. The mobile station according to claim 41 c h a r -
a c t e r i z e d b y the processing means recording ac-
cording to the Sub-Network Dependent Convergence Protocol
N-PDU sequence numbers of N-PDUs received or transferred.

- 10 43. The mobile station according to claim 39 or 40
c h a r a c t e r i z e d b y protocol data units includ-
ing N-PDUs.

44. The mobile station according to any of claims 41-43
c h a r a c t e r i z e d b y buffer means, buffering
uplink N-PDUs

- 15 45. The mobile station according to claim 44 c h a r -
a c t e r i z e d i n that the buffer size is suffi-
ciently large for a number of N-PDUs corresponding to the
maximum delay of RLC/MAC acknowledgement of transmission of
LLC PDU to be buffered.

- 20 46. The mobile station according to any of claims 39-43
c h a r a c t e r i z e d i n that the information on
next expected protocol data unit is transferred in a mes-
sage initiating or completing a change of base station or
handover as regards the mobile station.

- 25 47. The mobile station according to claim 46 c h a r -
a c t e r i z e d i n that the message initiating or com-
pleting a change of base station or handover is a PS Hando-
ver Command or PS Handover Complete message.

- 30 48. A support node in a packet switched communications
network comprising base stations for communications involv-

ing at least one mobile station, the support node characterized by processing means operating according to one or more protocols receiving protocol data units, the processing means extracting information for the support node to inform a mobile station of next expected uplink protocol data unit in association with packet switched base station change of the at least one mobile station.

49. A support node in a packet switched communications network comprising base stations for communications involving at least one mobile station, the support node characterized by processing means operating according to one or more protocols transferring protocol data units and receiver receiving informing from the at least one mobile station on next expected downlink protocol data unit in association with packet switched handover allowing lossless base station change of packet switched communications.

50. The support node according to claim 49 characterized by a protocol entity for maintaining N-PDU send and receive sequence numbers, and GTP T-PDU uplink and downlink sequence numbers for each packet flow subject to base station change of lossless type, the support node acting as source support node during the base station change, forwarding maintained sequence number information to a target support node of the base station change.

51. The support node according to claim 50 characterized by processing means for providing downlink N-PDU and downlink GTP T-PDU sequence numbers along with each N-PDU forwarded to the target support node.

52. The support node according to claim 50 characterized by a buffer for buffering a set of N-PDUs

sent down to the source BSS for each packet flow subject to lossless PS handover.

53. The support node according to claim 50 c h a r a c -
t e r i z e d b y processing means for including an RLC
5 ACK/NACK report in a PS handover command message, allowing
a mobile station to determine which one or more N-PDUs have
been completely received by the network.

54. The support node according to claim 50 c h a r a c -
t e r i z e d i n t h a t a PS handover command sent from
10 the support node to a source BSS includes expected Receive
N-PDU sequence number, at which a mobile station should
start transmission in a target cell for each uplink packet
flow subject to lossless handover.

55. The support node according to claim 50 c h a r a c -
15 t e r i z e d b y recording means for recording uplink
and downlink G-PDU sequence numbers associated with uplink
and downlink N-PDUs while in unacknowledged mode between
the mobile station and the support node.

56. The support node according to claim 49 c h a r a c -
20 t e r i z e d i n t h a t the base station change is within
GERAN or between GERAN and UTRAN.

57. The support node according to claim 49 c h a r a c -
t e r i z e d i n t h a t a protocol entity of the support
node maintains sequence continuity over the support node.

25 58. The support node according to claim 57 c h a r a c -
t e r i z e d i n t h a t the protocol entity operates
according to SNDCP.

59. The support node according to claim 49 c h a r a c -
t e r i z e d i n t h a t upon completion of a packet
30 switched base station change, the support node sustaining

the base station changed to starts transmissions of protocol data units to the at least one mobile station at the next protocol data unit expected by the at least one mobile station.

5 60. The support node according to claim 59 characterized by receive means, the transmissions being started upon the receive means receiving a PS Handover Complete message.

10 61. The support node according to any of claims 48-60 characterized in that the protocol data units are compliant with Sub-Network Dependent Convergence Protocol.

15 62. The support node according to claim 61 characterized by the processing means recording according to the Sub-Network Dependent Convergence Protocol N-PDU sequence numbers of N-PDUs received or transferred.

20 63. The support node according to claim 61 characterized by the processing means recording according to the Sub-Network Dependent Convergence Protocol G-PDU sequence numbers of G-PDUs received or transferred.

64. The support node according to any of claims 61-63 characterized by buffer means, buffering downlink N-PDUs

25 65. The support node according to claim 64 characterized in that the buffer size is sufficiently large for a number of N-PDUs corresponding to a delay attribute of the associated packet flow.

30 66. The support node according to any of claims 48-65 characterized in that the information on next expected protocol data unit is transferred in a mes-

sage initiating or completing a change of base station or handover as regards the at least one mobile station.

67. The support node according to claim 66 c h a r a c -
t e r i z e d i n that the message initiating or complet-
5 ing a change of base station or handover is a PS Handover
Command or PS Handover Complete message.

68. The support node according to claim 64 or 65
c h a r a c t e r i z e d i n that the buffered protocol
data units are transferred upon packet switched base sta-
10 tion change to a support node sustaining packet switched
communications over the base station to which the at least
one mobile station changed.

69. The support node according to claim 68 c h a r a c -
t e r i z e d i n that the buffered protocol data units
15 are transferred upon completion of a preparation phase of
the packet switched base station change.

70. The support node according to any of claims 48-69
c h a r a c t e r i z e d i n that the support not is a
Serving GPRS Support Node.

20 71. A base station entity in a packet switched communica-
tions network comprising at least one support node for com-
munications involving at least one mobile station, the base
station entity c h a r a c t e r i z e d b y receive
means, transmit means and buffer means, the buffer means
25 buffering downlink protocol data units, the buffer means
being emptied of protocol data units destined for the at
least one mobile station, the protocol data units being
transmitted by the transmit means upon the receive means
receiving a command of packet switched base station change,
30 as regards the one mobile station, from the at least one
support node.

72. The base station entity according to claim 71 characterized by processing means for deleting buffered LLC data that has not been sent to, or acknowledged by, the mobile station at the point in time
5 when the source BSS sends the PS handover command message to the mobile station.

73. The base station entity according to claim 72 characterized by sending means for sending a status message back to the source support node telling it
10 how many LLC PDUs have been deleted.

74. The base station entity according to claim 73 characterized in that the status message provides part of the one or more deleted LLC PDUs.

75. The base station entity according to claim 74
15 characterized in that the status message provides the header of the one or more deleted LLC PDUs.

76. The base station entity according to claim 71 characterized by receive means and transmit means, the receive means receiving uplink packet data from
20 the at least one mobile station while the buffer means being emptied of protocol data units destined for the at least one mobile station.

77. A communications system characterized by means for carrying out the method in any of claims
25 1-37.


78. A communications system characterized by a plurality of mobile stations in any of claims 38-48, the mobile stations being capable of reciprocal packet switched communications.

79. A communications system characterized by a plurality of support nodes in any of claims 49-70.


80. A communications system characterized by a plurality of base station entities in any of claims

5 71-76.


1/4

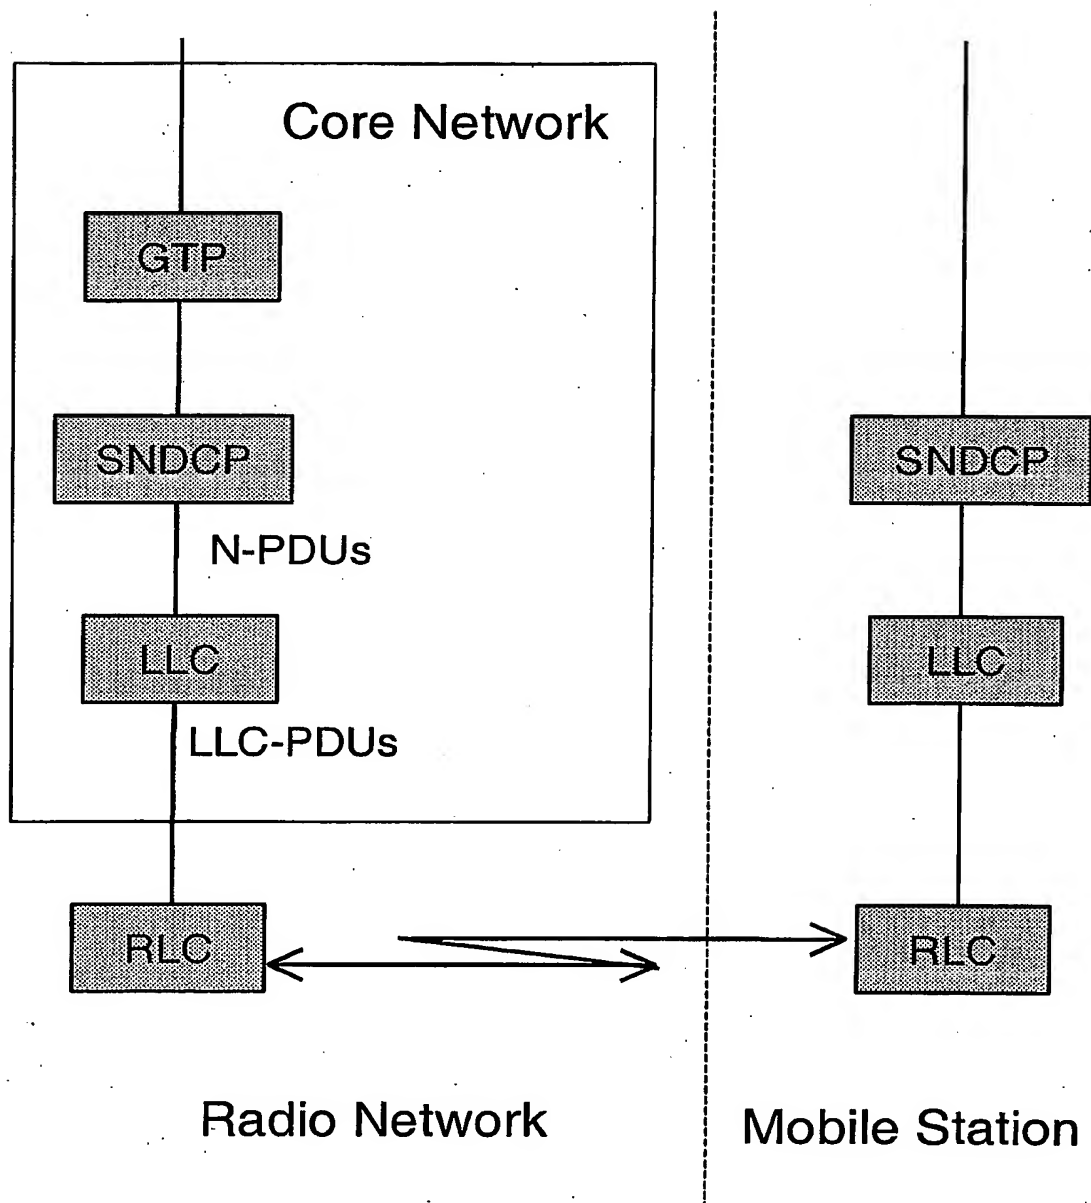**Fig. 1**

2/4

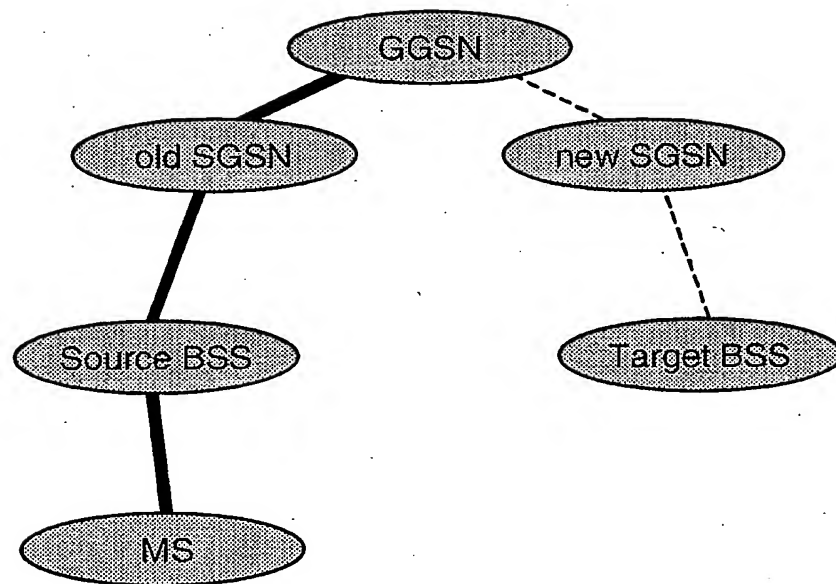**Fig. 2**

3/4

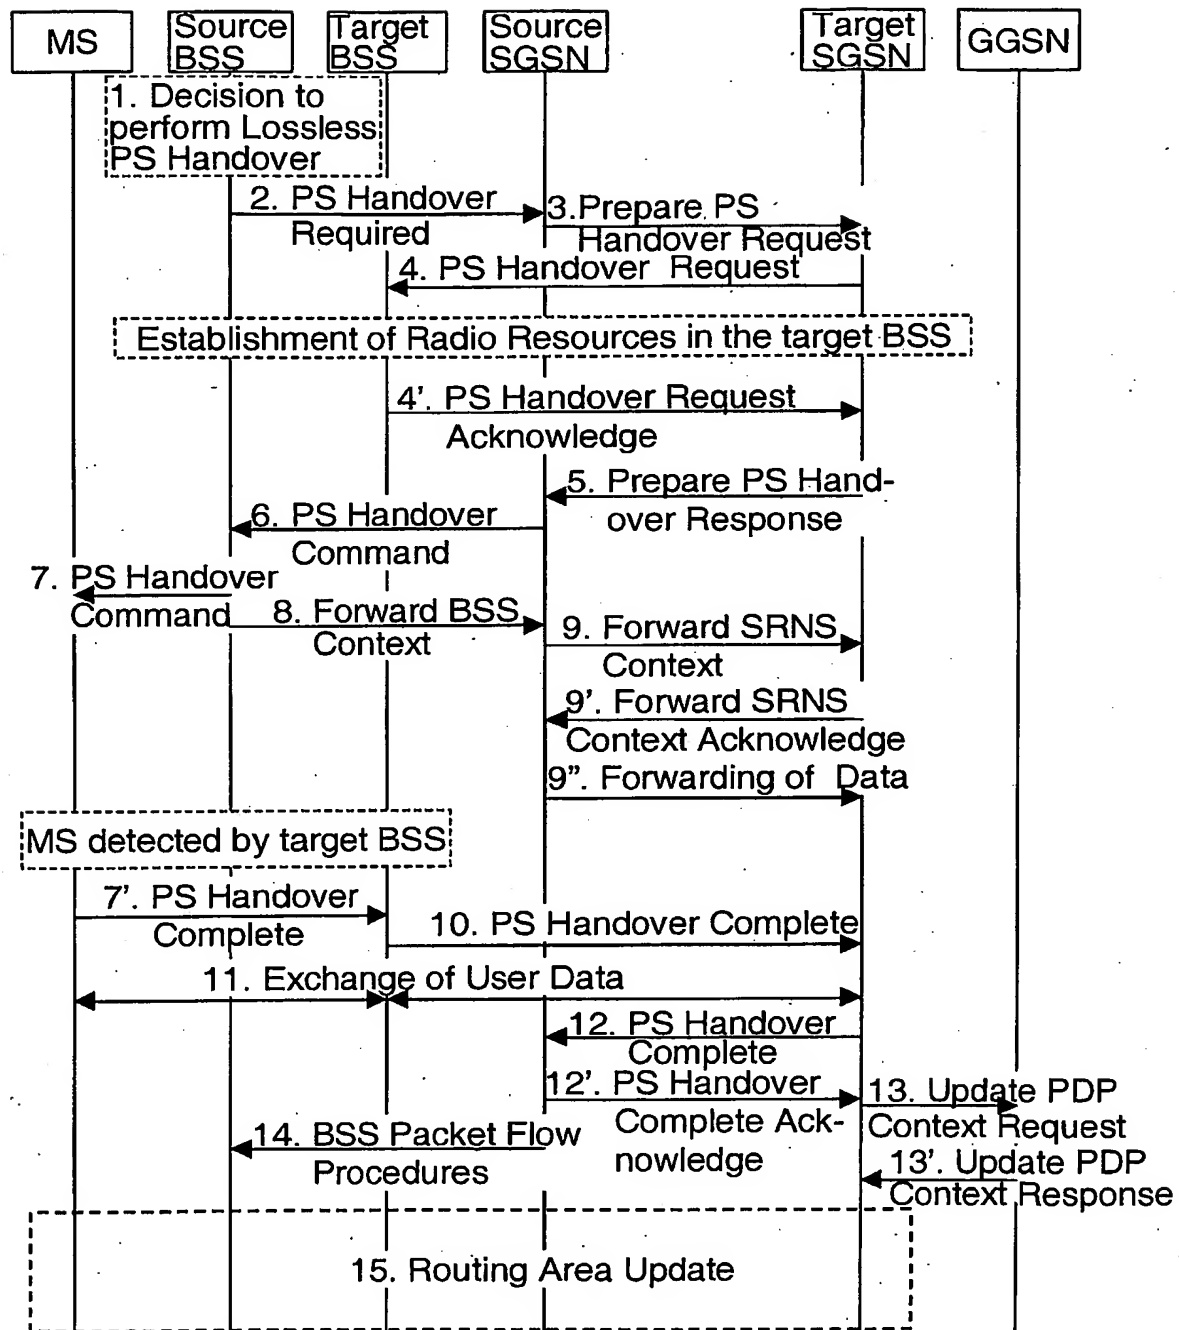**Fig. 3**

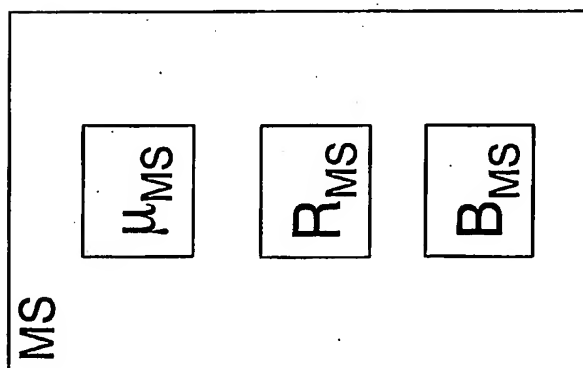


Fig. 4

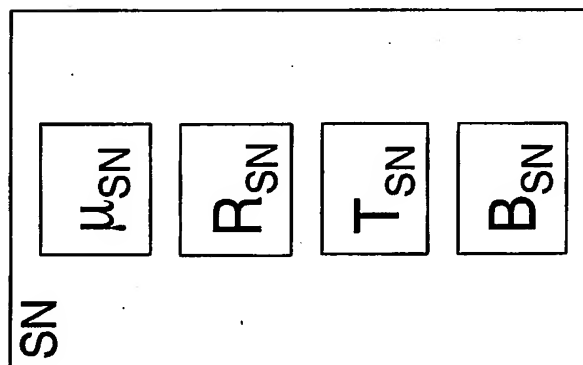


Fig. 5

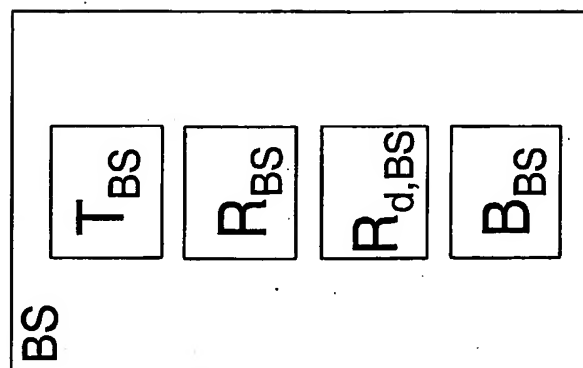


Fig. 6